

ARCHI 120

Extremely narrow beam by powerful 4 in 1 LED
Extra-long distance shooting.



SPECIFICATION


MODEL	LAND WAVE ARCHI 120
OPERATING VOLTAGE	24V DC, 48V DC
POWER CONSUMPTION	25W MAX
LED TYPE	4 in1 High Power LED
COLOUR TEMP OPTION	2700K , 3000K, 4000K, 5000K RGB, RGBW
CRI	80min
PRODUCT EFFICIENCY	60lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	4°, 10°, 25°, 40°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	φ120*100(H)mm φ127*146(H)mm (with top hat)
CABLE LENGTH	1000mm
CONTROL SYSTEM	ON/OFF, DMX/RDM
MOUNTING TYPE	Surface
IP RATING	IP66

FEATURES & OPTIONS



- | | |
|----------------|-------------------|
| 01. CW | 09. IP66 |
| 02. NW | 10. ANTI-SALINE |
| 03. WW | 11. POLAR |
| 04. DW | 12. DMX |
| 05. RAL9003 | 13. RFU |
| 06. GRMEN GREY | 14. RDM |
| 07. RAL7016 | 15. WIRELESS DATA |
| 08. RAL9005 | |

DIMENSIONS

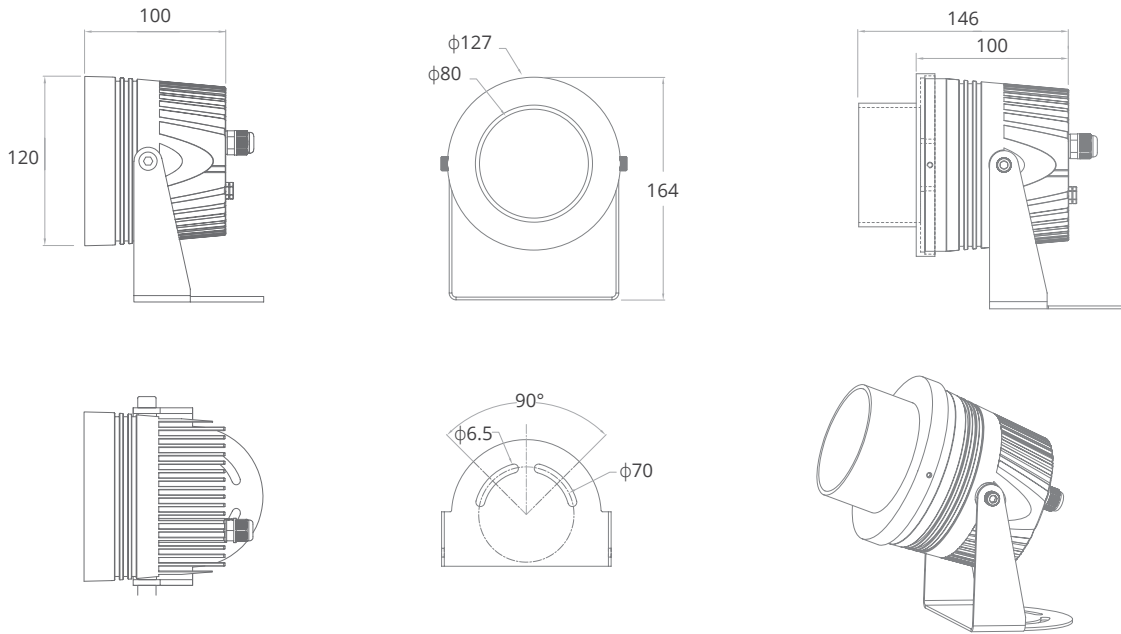

*all units are in mm

OPTIC SELECTION



LED	Lumens	Watts	Efficacy
WHITE	1275.08	25.00	51.01

CenterBeamLux	Illuminance at Distance
7653.72 lx	05.0 m
1913.43 lx	10.0 m
850.41 lx	15.0 m
478.36 lx	20.0 m
306.15 lx	25.0 m
212.60 lx	30.0 m

▪ Ver. Spread: 4.1° ▪ Horiz. Spread: 4.0°

3000K



LED	Lumens	Watts	Efficacy
WHITE	1502.70	25.00	60.10

CenterBeamLux	Illuminance at Distance
1098.86 lx	05.0 m
274.71 lx	10.0 m
122.10 lx	15.0 m
68.68 lx	20.0 m
43.95 lx	25.0 m
30.52 lx	30.0 m

▪ Ver. Spread: 11.5° ▪ Horiz. Spread: 11.6°