

# ARCHI MINI


The fixture utilizes the latest ultra narrow beam technology, thus ensuring fixture output is at high intensity while consuming extremely low power, The excellent optic design creates clean illumination and highly efficient light performance, The optic design offers excellent glare control.



## SPECIFICATION


<b>MODEL</b>	LAND WAVE ARCHI MINI
<b>OPERATING VOLTAGE</b>	24V DC
<b>POWER CONSUMPTION</b>	3W, 5W
<b>LED TYPE</b>	High Power LED
<b>COLOUR TEMP OPTION</b>	2700K / 3000K / 4000K / 5000K
<b>CRI</b>	80min, 90min
<b>PRODUCT EFFICIENCY</b>	63lm/W@3000K
<b>FULL WIDTH AT HALF MAXIMUM (OPTICS)</b>	3°, 7°
<b>MATERIAL</b>	Aluminum + Tempered Glass
<b>AMBIENT OPERATING TEMPERATURE</b>	-20°C ~ +55°C
<b>LUMEN MAINTENANCE</b>	50,000 hours/L70 at 25°C
<b>DIMENSIONS</b>	86 (L)*56(W)*110 (H)mm (with bracket)(Square) 86 (L)*56(W)*112 (H)mm (with bracket)(Circle)
<b>CABLE LENGTH</b>	500mm
<b>CONTROL SYSTEM</b>	Non Dim/0-10V/DMX - RDM
<b>MOUNTING TYPE</b>	Surface
<b>IP RATING</b>	IP66

## FEATURES & OPTIONS

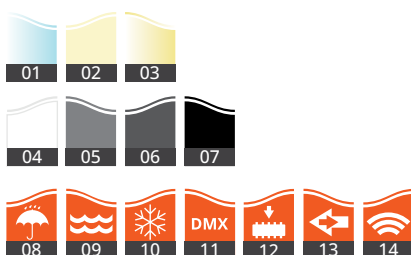

- |                |                   |
|----------------|-------------------|
| 01. CW         | 08. IP66          |
| 02. NW         | 09. AANTI-SALINE  |
| 03. WW         | 10. POLAR         |
| 04. RAL9003    | 11. DMX           |
| 05. GRMEN GREY | 12. RFU           |
| 06. RAL7016    | 13. RDM           |
| 07. RAL9005    | 14. WIRELESS DATA |

**DIMENSIONS**

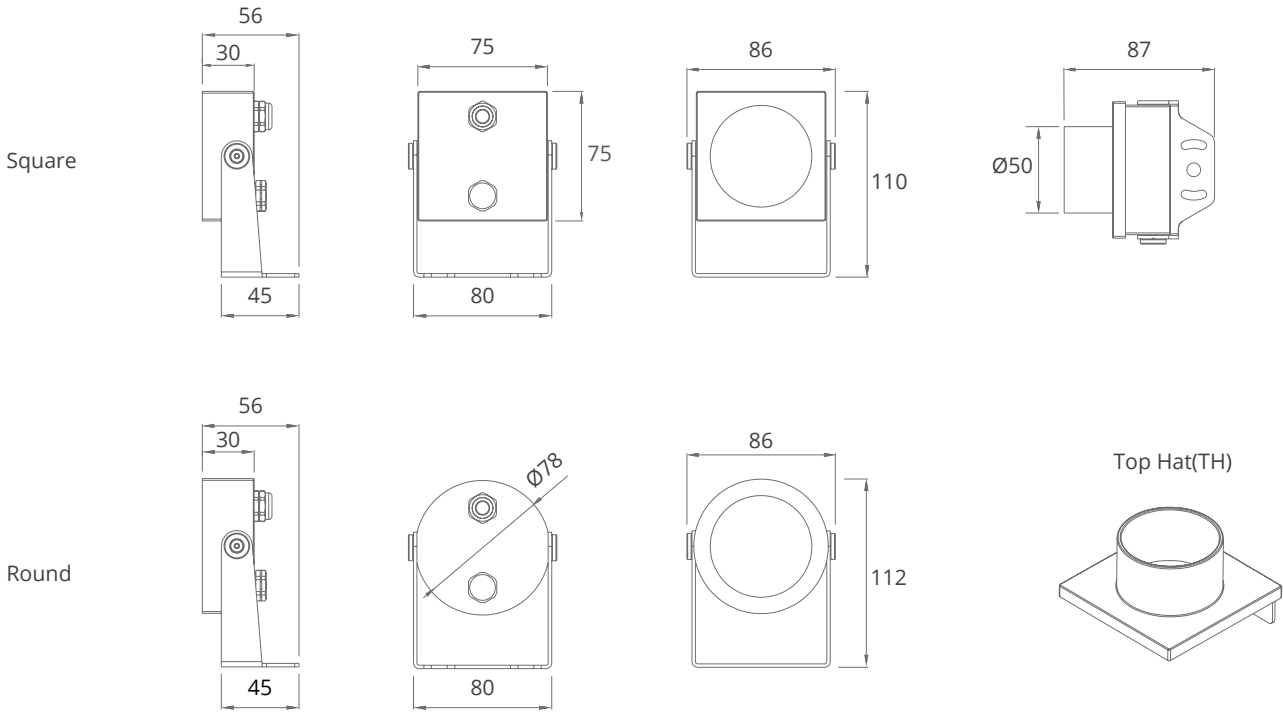

\*all units are in mm

**OPTIC SELECTION**



3°

LED	Lumens	Watts	Efficacy
WHITE	190.26	3.00	63.42

CenterBeamLux	Illuminance at Distance
2296.59 lx	05.0 m
574.15 lx	10.0 m
255.18 lx	15.0 m
143.54 lx	20.0 m
91.86 lx	25.0 m
63.79 lx	30.0 m

▪ Ver. Spread: 2.8°    ▪ Horiz. Spread: 2.8°

**3000K**



7°

LED	Lumens	Watts	Efficacy
WHITE	341.70	5.00	68.34

CenterBeamLux	Illuminance at Distance
2377.76 lx	05.0 m
594.44 lx	10.0 m
264.20 lx	15.0 m
148.61 lx	20.0 m
95.11 lx	25.0 m
66.05 lx	30.0 m

▪ Ver. Spread: 7.2°    ▪ Horiz. Spread: 7.2°