

# DIRECT VIEW PIXEL MIDI SLIM


The unique milky cover offers smooth light without any visible LED hotspots, The 2 steps bin selection provides uniform light output upon request, Ultra slim body results in easy installation.



## SPECIFICATION



<b>MODEL</b>	COLOUR WAVE DIRECT VIEW PIXEL MIDI SLIM
<b>OPERATING VOLTAGE</b>	24V DC, 48V DC
<b>POWER CONSUMPTION</b>	12W/1220mm
<b>LED TYPE</b>	SMD
<b>COLOUR TEMP OPTION</b>	2400K, 2700K, 3000K, 4000K, 5000K, Tunable White, RGB, RGBW
<b>PIXEL</b>	6Pixels/ 10Pixels/ 20Pixels/ 60Pixels/1220mm
<b>CRI</b>	90min, 80min
<b>PRODUCT EFFICIENCY</b>	72lm/W@3000K
<b>FULL WIDTH AT HALF MAXIMUM (OPTICS)</b>	120°
<b>MATERIAL</b>	PMMA + AL
<b>AMBIENT OPERATING TEMPERATURE</b>	-20°C ~ +55°C
<b>STORAGE TEMPERATURE</b>	25°C ~ +60°C
<b>LUMEN MAINTENANCE</b>	50,000 hours/L70 at 25°C
<b>DIMENSIONS</b>	1220(L)*24(W)*50(H)mm(Flat Diffuser), 305/610/1000mm available 1220(L)*24(W)*55(H)mm(Dome Diffuser), 305/610/1000mm available
<b>CABLE LENGTH</b>	300mm
<b>CONTROL SYSTEM</b>	ON/OFF, DMX/RDM, 0-10V Dim
<b>MOUNTING TYPE</b>	Surface
<b>IP RATING</b>	IP66

## FEATURES & OPTIONS

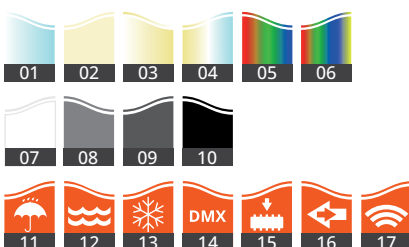


- |                |                   |
|----------------|-------------------|
| 01. CW         | 10. RAL9005       |
| 02. NW         | 11. IP66          |
| 03. WW         | 12. ANTI-SALINE   |
| 04. DW         | 13. POLAR         |
| 05. RGB        | 14. DMX           |
| 06. RGBW       | 15. RFU           |
| 07. RAL9003    | 16. RDM           |
| 08. GRMEN GREY | 17. WIRELESS DATA |
| 09. RAL7016    |                   |

**DIMENSIONS**

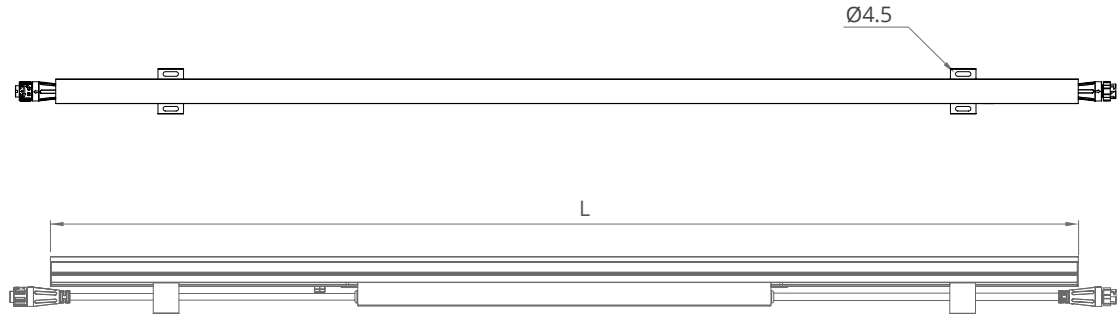


Flat Difuser(FD)




Dome Difuser(DD)

**Leader Cable**

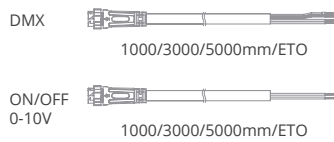

**Jumper Cable**

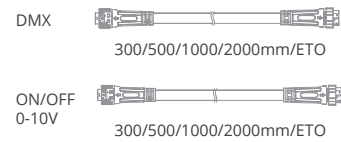

\*all units are in mm

**OPTIC SELECTION**



120°

LED	Lumens	Watts	Efficacy
WHITE	886.16	12.00	72.18

CenterBeamLux	Illuminance at Distance
3402.00 lx	0.3 m
850.50 lx	0.7 m
378.00 lx	1.0 m
212.63 lx	1.3 m
136.08 lx	1.7 m
94.50 lx	2.0 m

**3000K**

■ Ver. Spread: 114.0°    ■ Horiz. Spread: 112.7°



120°

LED	Lumens	Watts	Efficacy
RGBW	651.90	12.00	54.33

CenterBeamLux	Illuminance at Distance
2007.18 lx	0.3 m
501.80 lx	0.7 m
223.02 lx	1.0 m
125.45 lx	1.3 m
80.29 lx	1.7 m
55.76 lx	2.0 m



■ Ver. Spread: 114.0°    ■ Horiz. Spread: 112.7°