


DIRECT VIEW PIXEL

3 in 1 LED offers a fusion of well blended colours, Flexible installation is included with various cover material options, The compact dimension brings unlimited patter possibilities, The pixel board also contains flicker free illumination designed for video resolution and display.

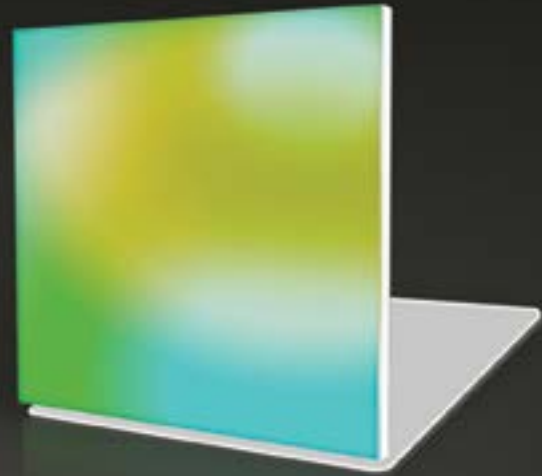

SPECIFICATION


MODEL	COLOUR WAVE DIRECT VIEW PIXEL
OPERATING VOLTAGE	24V DC
POWER CONSUMPTION	6.25W/25 Pixels, 16W/64 Pixels
LED TYPE	SMD
COLOUR TEMP OPTION	(24 bit) 2700K, 3000K, 4000K, 5000K, RGB
PIXEL	25 Pixels/ Unit, 64 Pixels/ Unit, Max spacing 40mm
FULL WIDTH AT HALF MAXIMUM (OPTICS)	120°
MATERIAL	PCB
AMBIENT OPERATING TEMPERATURE	-10°C ~ +40°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	175 (L)*175(W)*10(H)mm@25pixels 250 (L)*250(W)*10(H)mm@64pixels
CONTROL SYSTEM	DMX (Auto Addressing)
MOUNTING TYPE	Surface
IP RATING	IP20

FEATURES & OPTIONS



- | | |
|----------|-------------------|
| 01. CW | 07. ANTI-SALINE |
| 02. NW | 08. POLAR |
| 03. WW | 09. DMX |
| 04. RGB | 10. RFU |
| 05. RGBW | 11. RDM |
| 06. IP20 | 12. WIRELESS DATA |

DIMENSIONS

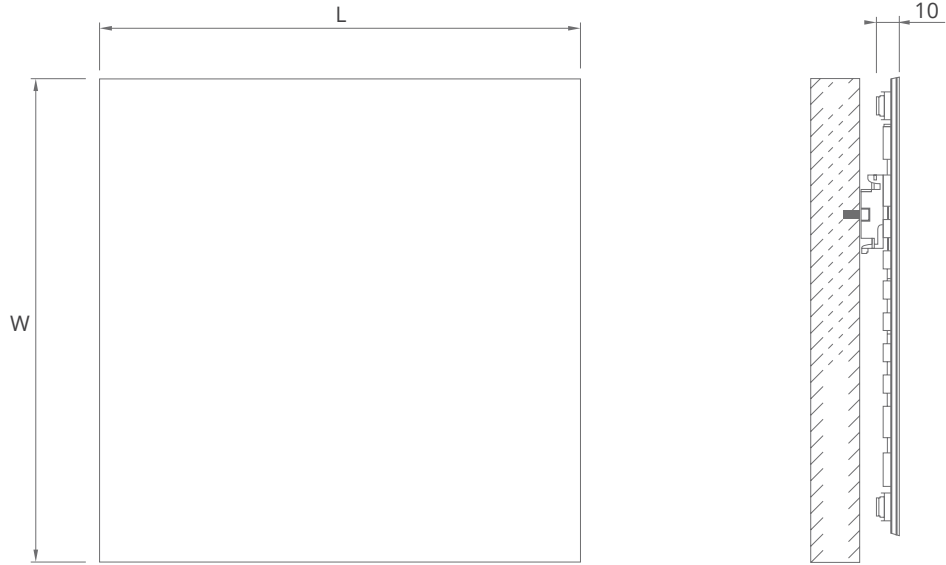

*all units are in mm

WIRING

