

DIRECT VIEW TUBE


The unique optical PMMA diffuser offers shadowless and smooth mixing colour, The wide cover brings eye-catching effect, Rapid easy installation is achieved with the built in power supply and quick plug connectors, The connection can be extended up to 38 meters.



SPECIFICATION


MODEL	COLOUR WAVE DIRECT VIEW TUBE
OPERATING VOLTAGE	AC 100-240V
POWER CONSUMPTION	8W/305mm, 32W/1220mm
LED TYPE	SMD
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K, Tunable White, RGB, RGBW
CRI	80min
PRODUCT EFFICIENCY	38lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	150°
MATERIAL	Aluminum + PMMA Cover
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	1220(L)*55(W)*65(H)mm 305/610/1000mm available
CABLE LENGTH	150mm
CONTROL SYSTEM	DMX/RDM
MOUNTING TYPE	Surface
IP RATING	IP66

FEATURES & OPTIONS



- | | |
|----------------|-------------------|
| 01. CW | 10. RAL9005 |
| 02. NW | 11. IP66 |
| 03. WW | 12. ANTI-SALINE |
| 04. DW | 13. POLAR |
| 05. RGB | 14. DMX |
| 06. RGBW | 15. RFU |
| 07. RAL9003 | 16. RDM |
| 08. GRMEN GREY | 17. WIRELESS DATA |
| 09. RAL7016 | |

DIMENSIONS

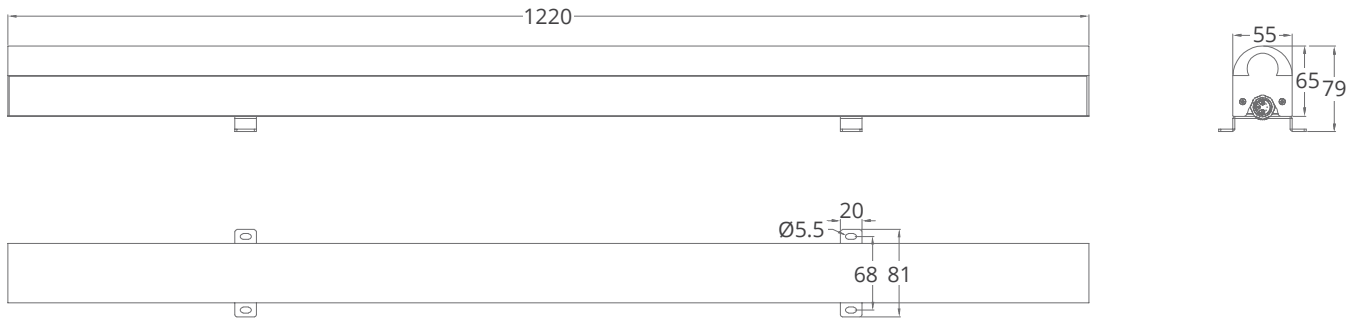

Leader Cable



1000/3000/5000/10000mm/ETO

Jumper Cable



300/500/1000/2000mm/ETO

*all units are in mm

OPTIC SELECTION



150°

LED	Lumens	Watts	Efficacy
RGBW	918.40	32.00	28.70
R	137.80	05.74	24.00
G	263.69	08.44	31.24
B	42.14	07.92	05.32
W	339.62	08.90	38.16

CenterBeamLux	illuminance at Distance
329.81 lx	0.8 m
82.46 lx	1.7 m
36.64 lx	2.5 m
20.60 lx	3.3 m
13.20 lx	4.2 m
9.14 lx	5.0 m



■ Ver. Spread: 164.6° ■ Horiz. Spread: 118.0°