

IN SLIM G2

Uniform light output via 3 steps bin selection upon request, The high quality diffuser eliminates any visible LED hotspots, straight icon and ensures superb illumination, The system provides step-on tempered glass for inground installations, A seamless continuous connection for lighting.



SPECIFICATION



MODEL	UNDER WAVE IN SLIM G2
OPERATING VOLTAGE	12V DC, 24V DC
POWER CONSUMPTION	5W/ meter, 9.6W/ meter, 14.4W/ meter
LED TYPE	SMD
COLOUR TEMP OPTION	2400K 2700K, 3000K, 4000K, 5000K, Tunable White, RGB, RGBW
CRI	90min, 80min
PRODUCT EFFICIENCY	82lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	120°
MATERIAL	Stainless Steel + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	1000(L)*28(W)*70(H)mm, 300/600/900/1200mm available
CABLE LENGTH	300mm
CONTROL SYSTEM	ON/OFF, DMX/RDM, 0-10V Dim
IP RATING	IP67
IK RATING	IK10

FEATURES & OPTIONS





- | | |
|----------|-------------------|
| 01. CW | 08. IK10 |
| 02. NW | 09. ANTI-SALINE |
| 03. WW | 10. POLAR |
| 04. DW | 11. DMX |
| 05. RGB | 12. RFU |
| 06. RGBW | 13. RDM |
| 07. IP67 | 14. WIRELESS DATA |

DIMENSIONS

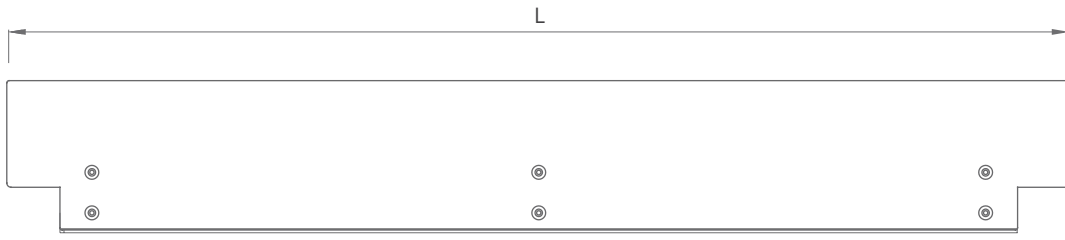

Type A

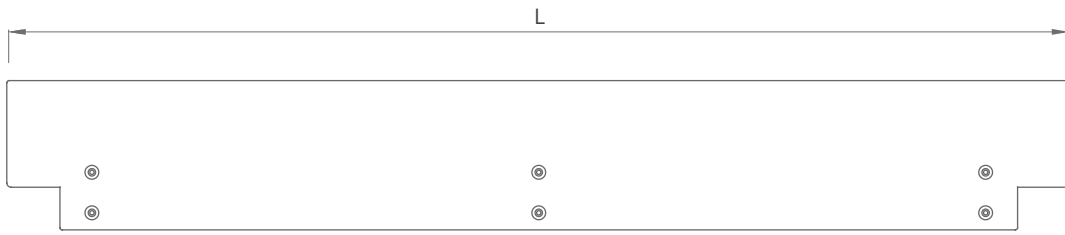

Type B

*all units are in mm

OPTIC SELECTION



LED	Lumens	Watts	Efficacy
WHITE	788.92	9.60	82.18

CenterBeamLux	Illuminance at Distance
2721.50 lx	0.3 m
679.97 lx	0.7 m
302.38 lx	1.0 m
170.09 lx	1.3 m
108.79 lx	1.7 m
75.59 lx	2.0 m

3000K

■ Ver. Spread: 121.3° ■ Horiz. Spread: 121.2°



LED	Lumens	Watts	Efficacy
RGBW	651.90	9.60	67.90

CenterBeamLux	Illuminance at Distance
2007.18 lx	0.3 m
501.80 lx	0.7 m
223.02 lx	1.0 m
125.45 lx	1.3 m
80.29 lx	1.7 m
55.76 lx	2.0 m



■ Ver. Spread: 123.9° ■ Horiz. Spread: 122.2°