


# INSTA LAND 115


Compatible with COB light source,  
The built in power supply makes the installation easier,  
Various beam angles offer from long range spot to flood,  
Flexible mounting methods,customizations are available.

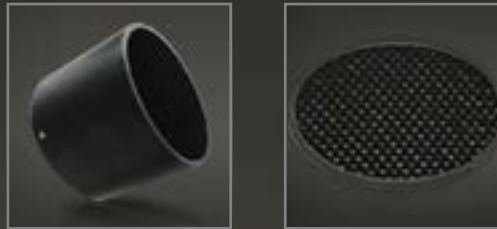

## SPECIFICATION



<b>MODEL</b>	LAND WAVE INSTA LAND 115
<b>OPERATING VOLTAGE</b>	24V DC, AC200-240V
<b>POWER CONSUMPTION</b>	40W Max
<b>LED TYPE</b>	COB, High Power LED
<b>COLOUR RANGE</b>	2700K, 3000K, 3500K, 4000K, 5000K, RGB, RGBW
<b>CRI</b>	90min, 80min
<b>SYSTEM EFFICIENCY</b>	71lm/W@3000K
<b>FWHM</b>	12°, 15°, 24°, 36°, 55°, 10°*30°
<b>MATERIAL</b>	Aluminum + Tempered Glass
<b>OPERATING TEMPERATURE</b>	-20°C ~ +55°C
<b>STORAGE TEMPERATURE</b>	-25°C ~ +60°C
<b>LIFE TIME</b>	50,000 hours/L70 at 25°C
<b>DIMENSIONS</b>	Ø114*196(L)*300(H)mm Ø114*253(L)*330(H)mm(With Top Hat)
<b>CABLE LENGTH</b>	300mm
<b>WATER PROOF</b>	IP66
<b>CONTROL</b>	ON/OFF, DMX/RDM, Triac Dim, 0-10V Dim

## FEATURES & OPTIONS

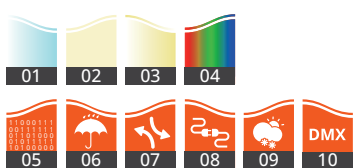

- 01. CW
- 02. NW
- 03. WW
- 04. RGB
- 05. DYNAMIC CONTROL
- 06. IP66
- 07. ADJUSTABLE
- 08. EASY INSTALLATION
- 09. EXTREME ENVIRONMENTS
- 10. DMX

**DIMENSIONS**

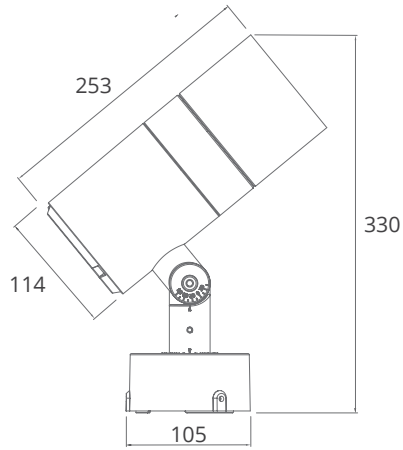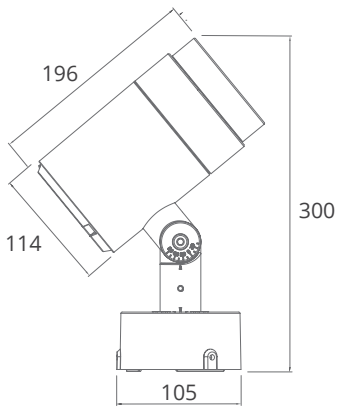

With Top Hat

Top Hat(TH)

Honey Comb(HC)



a



b



\*all units are in mm

**OPTIC SELECTION**



15°

LED	Lumens	Watts	Efficacy
WHITE	2720.00	40.00	68.00

CenterBeamLux	Illuminance at Distance
20685.95 lx	0.8 m
5170.46 lx	1.7 m
2238.17 lx	2.5 m
1258.97 lx	3.3 m
806.67 lx	4.2 m
559.52 lx	5.0 m

▪ Ver. Spread: 14.3°    ▪ Horiz. Spread: 13.7°

**3000K**



36°

LED	Lumens	Watts	Efficacy
WHITE	2840.00	40.00	71.00

CenterBeamLux	Illuminance at Distance
6165.10 lx	0.8 m
1605.75 lx	1.7 m
693.88 lx	2.5 m
409.88 lx	3.3 m
242.55 lx	4.2 m
167.32w lx	5.0 m

▪ Ver. Spread: 35.4°    ▪ Horiz. Spread: 35.1°