

INSTA LAND 42

The built in power supply makes the installation easier, Various beam angles offer from long range spot to flood, Flexible mounting methods,customizations are available.



SPECIFICATION


MODEL	LAND WAVE INSTA LAND 42
OPERATING VOLTAGE	24V DC, AC200-240V
POWER CONSUMPTION	6W Max
LED TYPE	High Power LED
COLOUR RANGE	2700K, 3000K, 3500K, 4000K, 5000K RGB, RGBW
CRI	90min, 80min
SYSTEM EFFICIENCY	72lm/W@3000K
FWHM	6°, 10°, 15°, 24°, 36°, 55°
MATERIAL	Aluminum + Tempered Glass
OPERATING TEMPERATURE	-20°C ~ +55°C
STORAGE TEMPERATURE	-25°C ~ +60°C
LIFE TIME	50,000 hours / L70 at 25°C
DIMENSIONS	Ø42*95(L)*72 (H)mm
CABLE LENGTH	300mm
WATER PROOF	IP66
CONTROL	ON/OFF, DMX/RDM, Triac Dim, 0-10V Dim

FEATURES & OPTIONS



- 01. CW
- 02. NW
- 03. WW
- 04. DW
- 05. RGB
- 06. DYNAMIC CONTROL
- 07. IP66
- 08. ADJUSTABLE
- 09. EASY INSTALLATION
- 10. EXTREME ENVIRONMENTS
- 11. DMX

DIMENSIONS

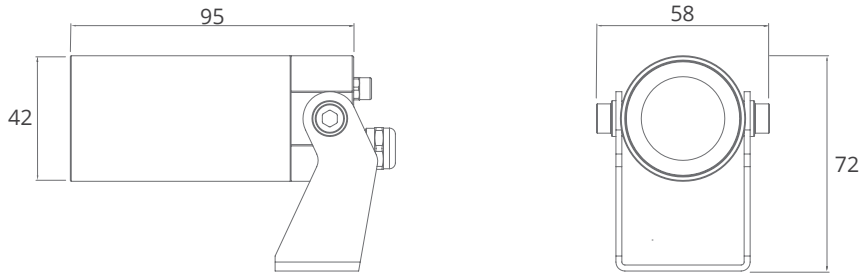

TopHat (TH)



Honey Comb (HC)



Mounting Spike (MTS)



*all units are in mm

OPTIC SELECTION



LED	Lumens	Watts	Efficacy
WHITE	421.38	6.00	70.23

CenterBeamLux	Illuminance at Distance
3240.14 lx	0.8 m
810.18 lx	1.7 m
360.02 lx	2.5 m
203.16 lx	3.3 m
128.41 lx	4.2 m
90.22 lx	5.0 m

▪ Ver. Spread: 14.3° ▪ Horiz. Spread: 13.7°



LED	Lumens	Watts	Efficacy
WHITE	432.00	6.00	72.00

CenterBeamLux	Illuminance at Distance
957.88 lx	0.8 m
249.45 lx	1.7 m
108.02 lx	2.5 m
63.78 lx	3.3 m
37.76 lx	4.2 m
26.17 lx	5.0 m

▪ Ver. Spread: 36.4° ▪ Horiz. Spread: 36.9°

3000K