

INSTA LAND 95

Compatible with COB or MR16 light source,
The built in power supply makes the installation easier,
Various beam angles offer from long range spot to flood,
Flexible mounting methods,customizations are available.



SPECIFICATION


MODEL	LAND WAVE INSTA LAND 95
OPERATING VOLTAGE	24V DC, AC200-240V
POWER CONSUMPTION	25W Max
LED TYPE	COB, High Power LED
COLOUR RANGE	2700K, 3000K, 3500K, 4000K, 5000K, RGB, RGBW
CRI	90min, 80min
SYSTEM EFFICIENCY	74lm / W@3000K
FWHM	12°, 15°, 24°, 36°, 55°, 10°*30°
MATERIAL	Aluminum + Tempered Glass
OPERATING TEMPERATURE	-20°C ~ +55°C
STORAGE TEMPERATURE	-25°C ~ +60°C
LIFE TIME	50,000 hours / L70 at 25°C
DIMENSIONS	Ø94*162(L)*220(H) mm Ø94*212(L)*257(H)mm(With Top Hat)
CABLE LENGTH	300mm
WATER PROOF	IP66
CONTROL	ON/OFF, DMX/RDM, Triac Dim, 0-10V Dim

FEATURES & OPTIONS



- 01. CW
- 02. NW
- 03. WW
- 04. RGB
- 05. DYNAMIC CONTROL
- 06. IP66
- 07. ADJUSTABLE
- 08. EASY INSTALLATION
- 09. EXTREME ENVIRONMENTS
- 10. DMX

DIMENSIONS

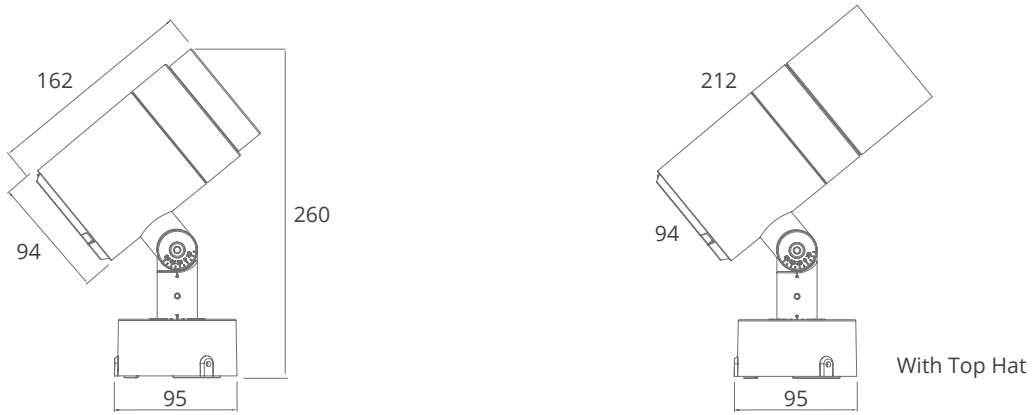

Top Hat(TH)

Honey Comb(HC)



a



b



*all units are in mm

OPTIC SELECTION



15°

LED	Lumens	Watts	Efficasy
WHITE	1750.00	25.00	70.00

CenterBeamLux	Illuminance at Distance
13309.85 lx	0.8 m
3327.46 lx	1.7 m
1440.04 lx	2.5 m
810.57 lx	3.3 m
519.82 lx	4.2 m
360.12 lx	5.0 m

▪ Ver. Spread: 14.3° ▪ Horiz. Spread: 13.7°



36°

LED	Lumens	Watts	Efficasy
WHITE	1 850.00	25.00	74.00

CenterBeamLux	Illuminance at Distance
4016.44 lx	0.8 m
1046.71 lx	1.7 m
452.76 lx	2.5 m
267.76 lx	3.3 m
158.22 lx	4.2 m
109.57 lx	5.0 m

▪ Ver. Spread: 35.4° ▪ Horiz. Spread: 35.1°

3000K