

INSTA LINEAR PL DC MILKY

The unique milky cover offers smooth light without any visible LED hot spots,
The 2 steps bin selection provides uniform light output upon request,
Ultra slim body results in easy installation.



SPECIFICATION



MODEL	HIGH WAVE INSTA LINEAR PL DC MILKY
OPERATING VOLTAGE	24V DC, 48V DC
POWER CONSUMPTION	12W/1000mm, 14W/1000mm
LED TYPE	SMD, High Power LED
COLOUR RANGE	2700K, 3000K, 4000K, 5000K, Tunable White, RGB, RGBW
PIXEL	8 Pixels/1000mm, 16 Pixels/1000mm
CRI	90min, 80min
SYSTEM EFFICIENCY	70lm/W@3000K
FWHM	120°
MATERIAL	Aluminum + Tempered Glass + PMMA
OPERATING TEMPERATURE	-20°C ~ +55°C
STORAGE TEMPERATURE	-25°C ~ +60°C
LIFE TIME	50,000 hours/L70 at 25°C
CONNECTION	Quick-Plug
DIMENSIONS	1000(L)*24(W)*50(H)mm (U Type Bracket) 1000(L)*24(W)*62(H)mm (Adjustable Bracket) 300/500/900/1200mm available
WATER PROOF	IP66, IP67
CONTROL	ON/OFF, DMX, 0-10V Dim

FEATURES & OPTIONS




- | | |
|------------------------|-----------------------------|
| 01. CW | 07. IP66 |
| 02. NW | 08. ADJUSTABLE |
| 03. WW | 09. EASY
INSTALLATION |
| 04. DW | 10. EXTREME
ENVIRONMENTS |
| 05. RGB | 11. DMX |
| 06. DYNAMIC
CONTROL | |

DIMENSIONS

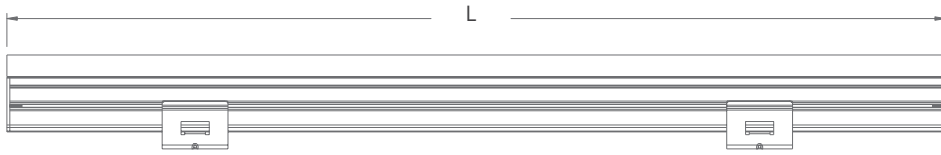

U Type Bracket



Adjustable Bracket



*all units are in mm

OPTIC SELECTION



120°

LED	Lumens	Watts	Efficacy
WHITE	840.96	12.00	70.08

CenterBeamLux	Illuminance at Distance
3402.00 lx	0.3 m
850.50 lx	0.7 m
378.00 lx	1.0 m
212.63 lx	1.3 m
136.08 lx	1.7 m
94.50 lx	2.0 m

3000K

- Ver. Spread: 114.0°
- Horiz. Spread: 112.7°



120°

LED	Lumens	Watts	Efficacy
RGBW	786.90	14.00	56.15

CenterBeamLux	Illuminance at Distance
2027.16 lx	0.3 m
551.85 lx	0.7 m
223.02 lx	1.0 m
137.72 lx	1.3 m
88.58 lx	1.7 m
60.32 lx	2.0 m



- Ver. Spread: 122.0°
- Horiz. Spread: 121.7°