

IP COVE PM

The integrated optic offers superb colour consistent without hotspots, The possesses low height profile and ultra slim The fixture delivers narrow beam angle for grazer The control system provides balanced uniform light.



SPECIFICATION


MODEL	HIGH WAVE IP COVE PM
OPERATING VOLTAGE	24V DC
POWER CONSUMPTION	8W/305mm, 32/1220mm
LED TYPE	SMD
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K, Tunable White, RGB
CRI	90min, 80min
PRODUCT EFFICIENCY	54lm/W@4000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	20°*90°, 40°*90°, 60°*90°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	1220(L)*25(W)*28.5(H)mm(Flat Bracket) 1220(L)*25(W)*48(H)mm(Adjustable Bracket) 305/610/915/1000mm ETO available
CABLE LENGTH	300mm
CONTROL SYSTEM	ON/OFF, DMX/RDM, 0-10V Dim
MOUNTING TYPE	Surface
IP RATING	IP66

FEATURES & OPTIONS



- | | |
|----------------|-------------------|
| 01. CW | 10. RAL9005 |
| 02. NW | 11. IP66 |
| 03. WW | 12. ANTI-SALINE |
| 04. DW | 13. POLAR |
| 05. RGB | 14. DMX |
| 06. RGBW | 15. RFU |
| 07. RAL9003 | 16. RDM |
| 08. GRMEN GREY | 17. WIRELESS DATA |
| 09. RAL7016 | |

DIMENSIONS

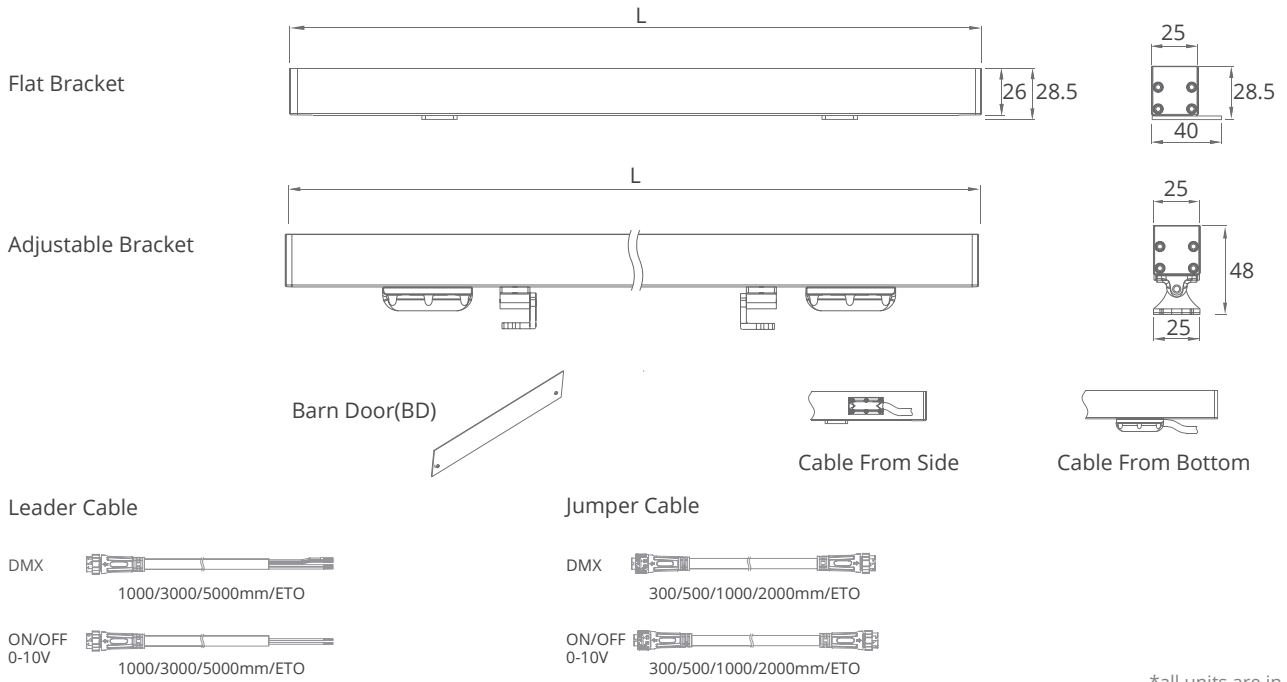

*all units are in mm

OPTIC SELECTION



LED	Lumens	Watts	Efficacy
WHITE	1536.00	32.00	48.00

CenterBeamLux	Illuminance at Distance
229.66 lx	0.8 m
57.42 lx	1.7 m
25.52 lx	2.5 m
14.35 lx	3.3 m
9.19 lx	4.2 m
6.38 lx	5.0 m

2700K

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°



LED	Lumens	Watts	Efficacy
WHITE	1600.40	32.00	50.01

CenterBeamLux	Illuminance at Distance
239.23 lx	0.8 m
59.81 lx	1.7 m
26.58 lx	2.5 m
14.95 lx	3.3 m
9.57 lx	4.2 m
6.65 lx	5.0 m

3000K

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°



LED	Lumens	Watts	Efficacy
WHITE	1728.00	32.00	54.00

CenterBeamLux	Illuminance at Distance
258.37 lx	0.8 m
64.59 lx	1.7 m
28.71 lx	2.5 m
16.15 lx	3.3 m
10.33 lx	4.2 m
7.18 lx	5.0 m

4000K

■ Ver. Spread: 22.5° ■ Horiz. Spread: 79.0°