

LAND 45


4 in 1 LED and Optic generates smooth colour under RGBW version, Compact and simple structure offers high lumen efficiency...



SPECIFICATION




MODEL	LAND WAVE LAND 45
OPERATING VOLTAGE	24V DC
POWER CONSUMPTION	6W Max
LED TYPE	High power LED
COLOUR TEMP OPTION	2700K, 3000K, 3500K, 4000K, 5000K, Tunable White, RGB, RGBW
CRI	90min, 80min
PRODUCT EFFICIENCY	76.40lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	5°, 8°, 15°, 24°, 36°, 45°, 8°*50°, 20°*40°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000~7,000 hours at 70% Lume Maintenance
DIMENSIONS	45*55*70mm(ON/OFF Version), 45*80*70mm(DMX Version)
CABLE LENGTH	500mm
CONTROL SYSTEM	ON/OFF, DMX/RDM
MOUNTING TYPE	Surface
IP RATING	IP67

FEATURES & OPTIONS






- | | |
|----------------|-------------------|
| 01. CW | 10. RAL9005 |
| 02. NW | 11. IP67 |
| 03. WW | 12. ANTI-SALINE |
| 04. DW | 13. POLAR |
| 05. RGB | 14. DMX |
| 06. RGBW | 15. RFU |
| 07. RAL9003 | 16. RDM |
| 08. GRMEN GREY | 17. WIRELESS DATA |
| 09. RAL7016 | |

DIMENSIONS

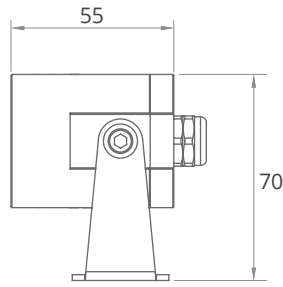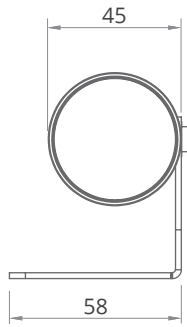


ON/OFF Version

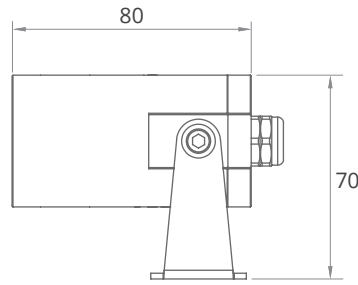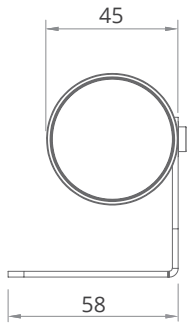

DMX/RDM Version

Top Hat (TH) 5



Honey Comb (HB)



*all units are in mm

OPTIC SELECTION



8°

LED	Lumens	Watts	Efficacy
WHITE	385.80	6.00	64.30

CenterBeamLux	Illuminance at Distance
37783.58 lx	0.8 m
9445.90 lx	1.7 m
4198.18 lx	2.5 m
2361.47 lx	3.3m
1511.34 lx	4.2 m
1049.54 lx	5.0 m

▪ Ver. Spread: 8.1° ▪ Horiz. Spread: 8.5°



24°

LED	Lumens	Watts	Efficacy
WHITE	458.40	6.00	76.40

CenterBeamLux	Illuminance at Distance
1820.86 lx	0.8 m
425.22 lx	1.7 m
200.10 lx	2.5 m
121.30 lx	3.3 m
84.83 lx	4.2 m
65.02 lx	5.0 m

▪ Ver. Spread: 24.7° ▪ Horiz. Spread: 25.7°

3000K