

LINEAR PM AC


The built in power supply makes the installation easier, Compact design for limited space with high consistency of light out put, Various beam angles are available for balancing efficiency and lighting effects, Connection extension can be up to 38 meters.



SPECIFICATION




MODEL	HIGH WAVE LINEAR PM AC
OPERATING VOLTAGE	AC 100-240V
POWER CONSUMPTION	9W/320mm, 36W/1220mm
LED TYPE	High Power LED
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K, Tunable White, RGB, RGBW
CRI	90min, 80min
PRODUCT EFFICIENCY	78lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	Tilt 2.5@11°, 6°, 8°*15°, 8°*30°, 8°*50°, 20°*40°, 25°, 45°, 60°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	1220(L)*35(W)*61(H)mm, 320/620/920mm available
CABLE LENGTH	150mm
CONTROL SYSTEM	ON/OFF, DMX/RDM, TRIAC Dim, 0-10V Dim
MOUNTING TYPE	Surface
IP RATING	IP66

FEATURES & OPTIONS




- | | |
|----------------|-------------------|
| 01. CW | 10. RAL9005 |
| 02. NW | 11. IP66 |
| 03. WW | 12. ANTI-SALINE |
| 04. DW | 13. POLAR |
| 05. RGB | 14. DMX |
| 06. RGBW | 15. RFU |
| 07. RAL9003 | 16. RDM |
| 08. GRMEN GREY | 17. DALI |
| 09. RAL7016 | 18. WIRELESS DATA |

DIMENSIONS

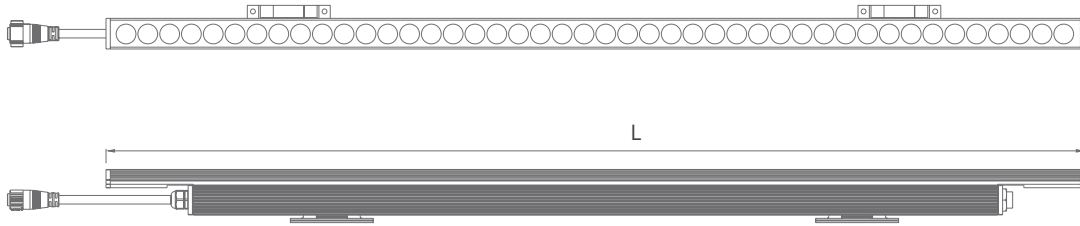

Louver




Barn Door(BD)

Leader Cable



Jumper Cable



*all units are in mm

OPTIC SELECTION



6°

LED	Lumens	Watts	Efficacy
WHITE	2521.76	36.00	70.04

CenterBeamLux	Illuminance at Distance
7777.77 lx	05.0 m
1944.44 lx	10.0 m
864.20 lx	15.0 m
486.11 lx	20.0 m
311.11 lx	25.0 m
216.05 lx	30.0 m

■ Ver. Spread: 5.7° ■ Horiz. Spread: 5.7°



8°x50°

LED	Lumens	Watts	Efficacy
WHITE	2628.00	64.00	73.00

CenterBeamLux	Illuminance at Distance
836.36 lx	05.0 m
209.09 lx	10.0 m
92.93 lx	15.0 m
52.27 lx	20.0 m
33.45 lx	25.0 m
23.23 lx	30.0 m

■ Ver. Spread: 6.5° ■ Horiz. Spread: 48.5°

3000K