

# SPOT 150

Elegant designed fixture offers consistent and high quality light output, Compact dimension enable installation at limit space, Various beam angles offer from extremely narrow to wide or oval beam. Good Thermal management benefits long life time.



## SPECIFICATION



MODEL	LAND WAVE SPOT 150
OPERATING VOLTAGE	24V DC, 48V DC, AC 100-240V
POWER CONSUMPTION	35W MAX
LED TYPE	High Power LED
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K Tunable White, RGB, RGBW
CRI	90min, 80min
PRODUCT EFFICIENCY	72lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	4°, 10°, 25°, 40°, 8°*15°, 8°*30°, 8°*60°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	Ø150*125(H)mm
CABLE LENGTH	1000mm
CONTROL SYSTEM	ON/OFF, DMX/RDM, 0-10V Dim
MOUNTING TYPE	Surface
IP RATING	IP66

## FEATURES & OPTIONS




- |          |                   |
|----------|-------------------|
| 01. CW   | 08. ANTI-SALINE   |
| 02. NW   | 09. POLAR         |
| 03. WW   | 10. DMX           |
| 04. DW   | 11. RFU           |
| 05. RGB  | 12. RDM           |
| 06. RGBW | 13. DALI          |
| 07. IP66 | 14. WIRELESS DATA |


DIMENSIONS

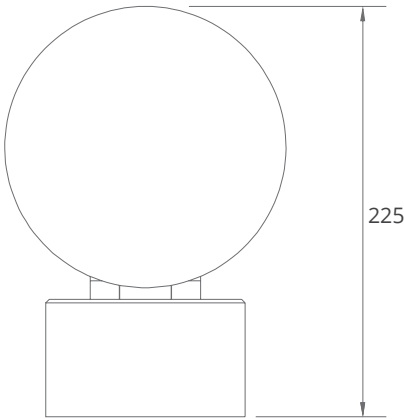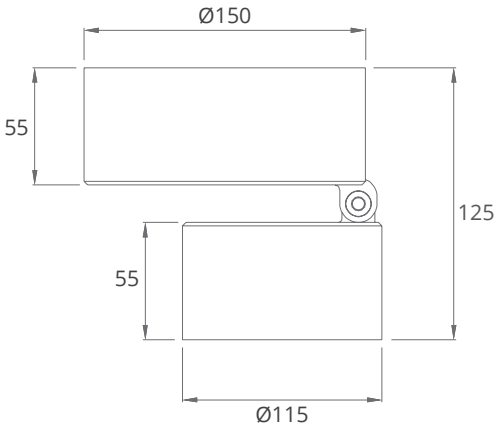

Honey Comb(HC)



Top Hat(TH)



\*all units are in mm

OPTIC SELECTION



4°

LED	Lumens	Watts	Efficacy
WHITE	2373.70	35.00	67.82

CenterBeamLux	Illuminance at Distance	
11262.35 lx	05.0 m	
2814.54 lx	10.0 m	
1190.25 lx	15.0 m	
702.57 lx	20.0 m	
448.07 lx	25.0 m	
312.19 lx	30.0 m	

■ Ver. Spread: 4.1° ■ Horiz. Spread: 4.2°



10°

LED	Lumens	Watts	Efficacy
WHITE	2524.20	35.00	72.12

CenterBeamLux	Illuminance at Distance	
1711.59 lx	05.0 m	
419.11 lx	10.0 m	
350.74 lx	15.0 m	
105.65 lx	20.0 m	
67.23 lx	25.0 m	
35.31 lx	30.0 m	

■ Ver. Spread: 11.1° ■ Horiz. Spread: 10.5°

3000K