

SPOT 200

Elegant designed fixture offers consistent and high quality light output, Compact dimension enable installation at limit space, Various beam angles offer from extremely narrow to wide or oval beam. Good Thermal management benefits long life time.



SPECIFICATION


MODEL	LAND WAVE SPOT 200
OPERATING VOLTAGE	24V DC, 48V DC, AC 100-240V
POWER CONSUMPTION	70W MAX
LED TYPE	High Power LED
COLOUR TEMP OPTION	2700K, 3000K, 4000K, 5000K Tunable White, RGB, RGBW
CRI	90min, 80min
PRODUCT EFFICIENCY	70lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	4°,10°, 25°, 40°, 8°*15°, 8°*30°, 8°*60°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	Ø200*137(H)mm
CABLE LENGTH	1000mm
CONTROL SYSTEM	ON/OFF, DMX/RDM, 0-10V Dim
MOUNTING TYPE	Surface
IP RATING	IP66

FEATURES & OPTIONS




- 01. CW
- 02. NW
- 03. WW
- 04. DW
- 05. RGB
- 06. RGBW
- 07. IP66
- 08. ANTI-SALINE
- 09. POLAR
- 10. DMX
- 11. RFU
- 12. RDM
- 13. WIRELESS DATA


DIMENSIONS

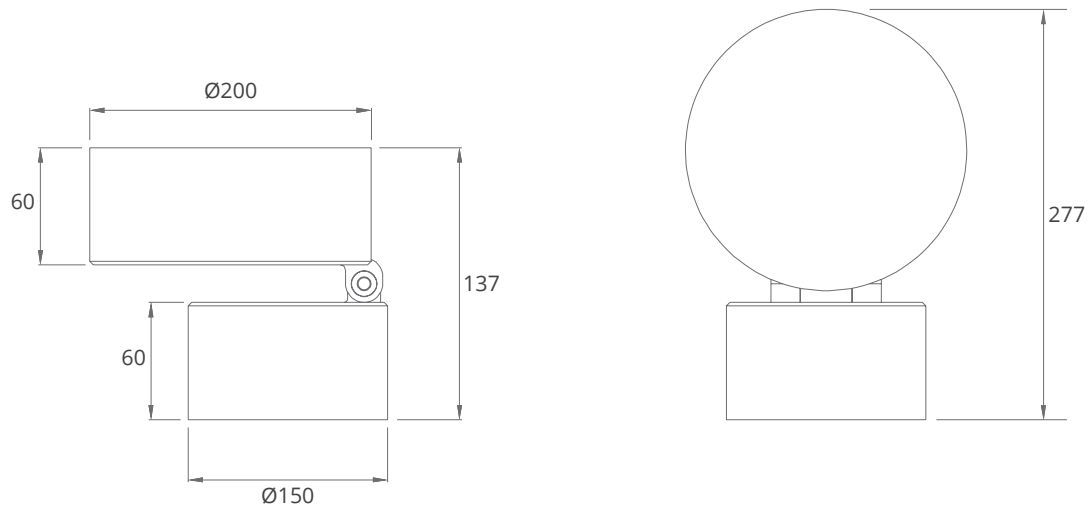

Honey Comb(HC)



Top Hat (TH)



*all units are in mm

OPTIC SELECTION



4°

LED	Lumens	Watts	Efficacy
WHITE	4762.10	70.00	68.03

CenterBeamLux	Illuminance at Distance
21545.37 lx	05.0 m
5384.25 lx	10.0 m
2389.23 lx	15.0 m
1345.04 lx	20.0 m
857.96 lx	25.0 m
595.91 lx	30.0 m

- Ver. Spread: 4.1°
- Horiz. Spread: 4.2°

3000K



10°

LED	Lumens	Watts	Efficacy
WHITE	4908.40	70.00	72.12

CenterBeamLux	Illuminance at Distance
3356.59 lx	05.0 m
338.21 lx	10.0 m
370.21 lx	15.0 m
211.43 lx	20.0 m
131.43 lx	25.0 m
90.61 lx	30.0 m

- Ver. Spread: 11.3°
- Horiz. Spread: 11.5°