

SPOT 30


Equipped with state of art and ultra-compact design, The system includes various mounting methods including free standing, dry wall, in ground style, High efficacy and high CRI, Excellent glare control and optic performance.



SPECIFICATION

MODEL	LAND WAVE SPOT 30
OPERATING VOLTAGE	700 mA
POWER CONSUMPTION	2.86W MAX
LED TYPE	High Power LED
COLOUR RANGE	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90min
PRODUCT EFFICIENCY	85lm/W@3000K
FULL WIDTH AT HALF MAXIMUM (OPTICS)	11°, 15°, 28°, 44°, 52°*12°
MATERIAL	Aluminum + Tempered Glass
AMBIENT OPERATING TEMPERATURE	-20°C ~ +55°C
LUMEN MAINTENANCE	50,000 hours/L70 at 25°C
DIMENSIONS	φ41*70 (H)mm, φ60*60 (H)mm φ46*60 (H)mm
CABLE LENGTH	500mm
CONTROL SYSTEM	ON/OFF, DMX, 0-10V Dim
MOUNTING TYPE	Surface
IP RATING	Ip67


FEATURES & OPTIONS

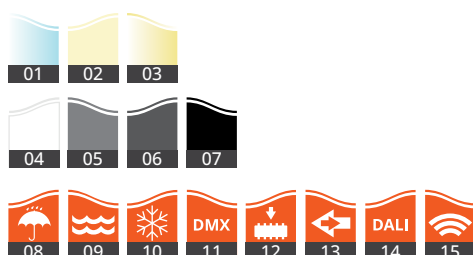


- 01. CW
- 02. NW
- 03. WW
- 04. RAL9003
- 05. GRMEN GREY
- 06. RAL7016
- 07. RAL9005
- 08. IP67
- 09. ANTI-SALINE
- 10. POLAR
- 11. DMX
- 12. RFU
- 13. RDM
- 14. DALI
- 15. WIRELESS DATA

DIMENSIONS

DryWall Mount(DWM)

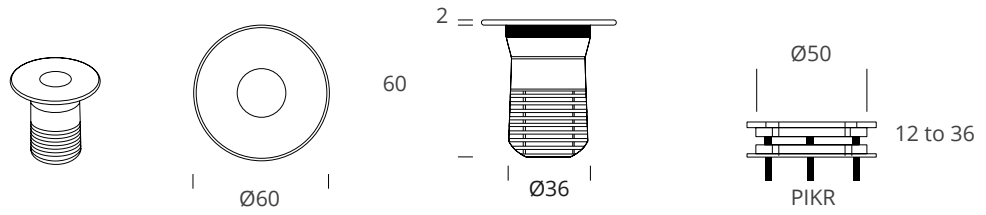

InGround Mount(IGM)

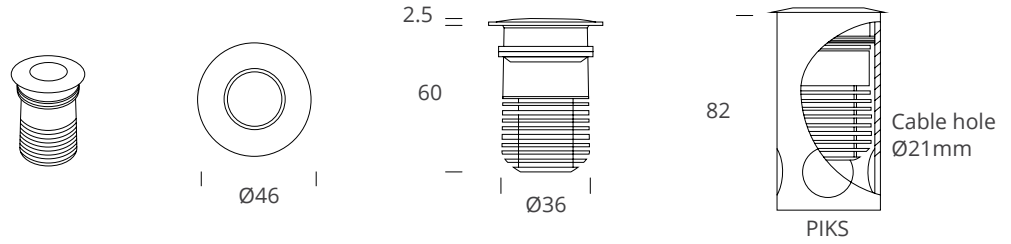

*all units are in mm

OPTIC SELECTION



11°

LED	Lumens	Watts	Efficacy
WHITE	212.53	2.93	72.53

CenterBeamLux	Illuminance at Distance	
7653.72 lx	0.8 m	
1913.43 lx	1.7 m	
850.41lx	2.5 m	
478.36 lx	3.3 m	
306.15 lx	4.2 m	
212.60 lx	5.0 m	

▪ Ver. Spread: 11.6° ▪ Horiz. Spread: 11.5°

3000K



15°

LED	Lumens	Watts	Efficacy
WHITE	252.97	2.99	84.60

CenterBeamLux	Illuminance at Distance	
1098.86 lx	0.8 m	
274.71 lx	1.7 m	
122.10 lx	2.5 m	
68.68 lx	3.3 m	
43.95 lx	4.2 m	
30.52 lx	5.0 m	

▪ Ver. Spread: 14.4° ▪ Horiz. Spread: 14.5°