

# TRANSFORM


Generates extremely high lumen output basing on good thermal management, Delivers strong light Intensity by extremely narrow beam, Robust structure proven to be ultra-stable under extremely weather conditions, 4 in 1 LED and optic creates smooth colour under RGBW option.



## SPECIFICATION


<b>MODEL</b>	LAND WAVE TRANSFORM
<b>OPERATING VOLTAGE</b>	AC 100-240V
<b>POWER CONSUMPTION</b>	135W/ unit, 270W/ 2units
<b>LED TYPE</b>	4 in 1 High Power LED
<b>COLOUR TEMP OPTION</b>	2700K, 3000K, 4000K, 5000K Tunable White, RGB
<b>CRI</b>	80min
<b>PRODUCT EFFICIENCY</b>	88.18lm/W@4000K
<b>FULL WIDTH AT HALF MAXIMUM (OPTICS)</b>	5°, 25°, 40°, 60°, 5°*20°
<b>MATERIAL</b>	Aluminum + Tempered Glass
<b>AMBIENT OPERATING TEMPERATURE</b>	-20°C ~ +55°C
<b>LUMEN MAINTENANCE</b>	50,000 hours/L70 at 25°C
<b>DIMENSIONS</b>	658(L)*180(W)*550.5(H)mm
<b>CABLE LENGTH</b>	500mm
<b>CONTROL SYSTEM</b>	ON/OFF, DMX/RDM, 0-10V Dim
<b>MOUNTING TYPE</b>	Surface
<b>IP RATING</b>	Ip66

## FEATURES & OPTIONS



- |                |                 |
|----------------|-----------------|
| 01. CW         | 08. RAL7016     |
| 02. NW         | 09. RAL9005     |
| 03. WW         | 10. ANTI-SALINE |
| 04. DW         | 11. POLAR       |
| 05. RGB        | 12. DMX         |
| 06. RAL9003    | 13. RFU         |
| 07. GRMEN GREY | 14. RDM         |


**DIMENSIONS**

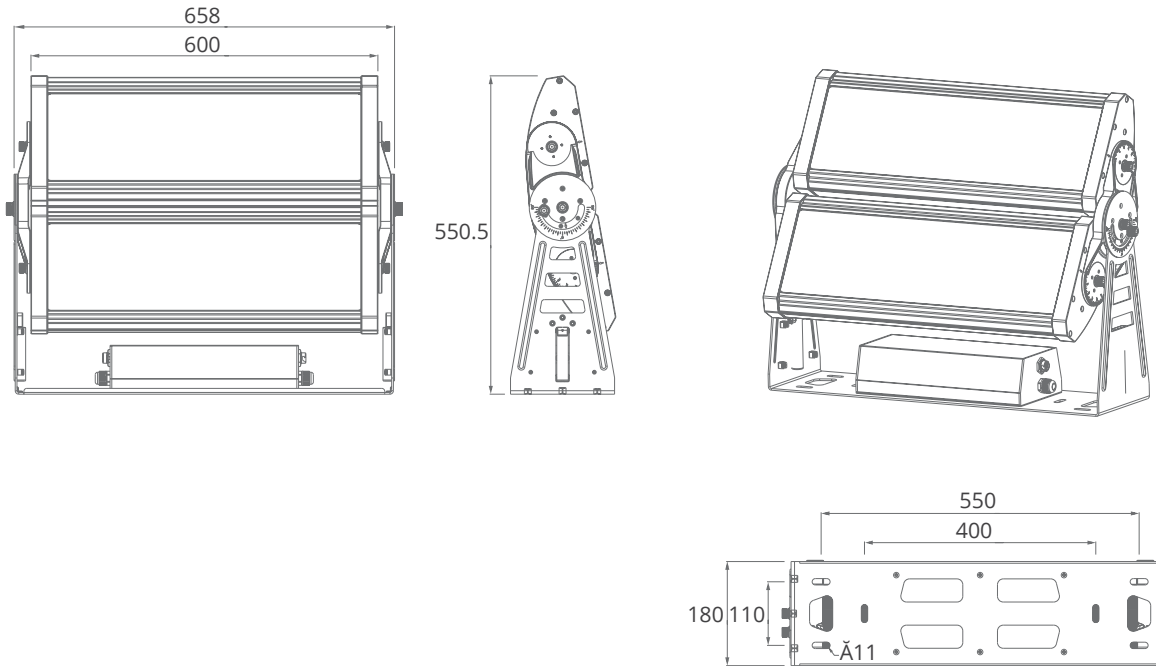

Leader Cable



Jumper Cable



\*all units are in mm

**OPTIC SELECTION**



LED	Lumens	Watts	Efficacy
WHITE	21092.40	270.00	78.12

CenterBeamLux	Illuminance at Distance
65068.14 lx	05.0 m
16267.04 lx	10.0 m
7229.79 lx	15.0 m
4066.76 lx	20.0 m
2602.73 lx	25.0 m
1807.45 lx	30.0 m

**3000K**

- Ver. Spread: 5.7°
- Horiz. Spread: 5.7°



LED	Lumens	Watts	Efficacy
WHITE	23811.92	270.00	88.18

CenterBeamLux	Illuminance at Distance
73461.95 lx	05.0 m
18365.49 lx	10.0 m
8462.44 lx	15.0 m
4591.37 lx	20.0 m
2938.48 lx	25.0 m
2040.61 lx	30.0 m

**4000K**

- Ver. Spread: 5.7°
- Horiz. Spread: 5.7°